

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
7 October 2004 (07.10.2004)


PCT

(10) International Publication Number  
**WO 2004/085944 A2**

- (51) International Patent Classification<sup>7</sup>: **F28D**
- (74) Agent: ROMINVENT S.A.; 35, Ermil Pangratti Street, Sector 1, Bucharest (RO).
- (21) International Application Number: PCT/RO2004/000006
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 22 March 2004 (22.03.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: a2003-00261 26 March 2003 (26.03.2003) RO
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
- (71) Applicant and  
(72) Inventor: TATAR, Doru [RO/RO]; 24, Domneasca Street, apt.36, R-6200 Galati (RO).

[Continued on next page]

(54) Title: REGENERATOR FOR HEAT EXCHANGER

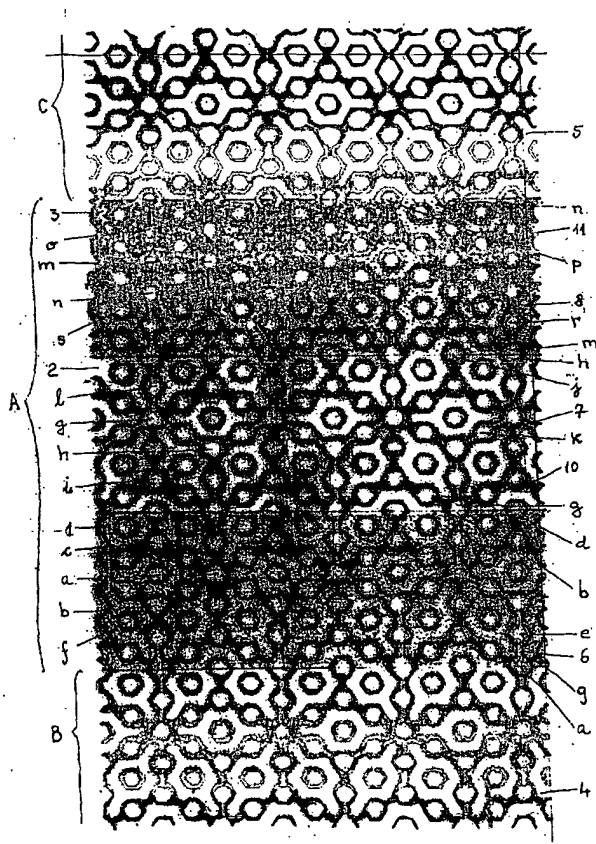

(57) Abstract: The invention relates to a regenerator for regenerative type heat exchanger of the fluid pre-heaters. The regenerator for heat exchanger according to the invention consists in a pack (A) of three courses (1, 2 and 3), lower, median and upper respectively, which are sequentially horizontally overlapped and, several vertical channels (b) in the lower course (1) overlap other several vertical channels (g) in the median course (2) and, several vertical channels (h) in the median course (2) overlap several vertical channels in upper course (3), having such a flow rate to ensure a maximal horizontal circulation of the heat carrier through all the vertical channels of the structure.

WO 2004/085944 A2



GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *without international search report and to be republished upon receipt of that report*